

Retekess

WIRELESS PEEPHOLE VIDEO DOORBELL



T13D

USER MANUAL

Please make full charge before use it!

This smart battery Wifi
Video Doorbell lets you
answer the door from

anywhere,whether you're
halfway across the world,
or just too busy to walk to
the door. It lets you see,
hear and speak to visitors
with ease using your smart
phone or tablet.



Note: If any security apps have been installed in
your phone/tablet that could affect the
“WeCSee” app, please be sure to
grant it the appropriate permissions.


STEP 1 INSTALL APP



NOTE: Search for **WeCSee** on the
Google Play/iPhone app stores.


STEP 2 CREATE ACCOUNT

Open the app. Follow the
prompts and tap
“Sign Up” to create an
account. Be sure to allow
all permissions requested
by the app.

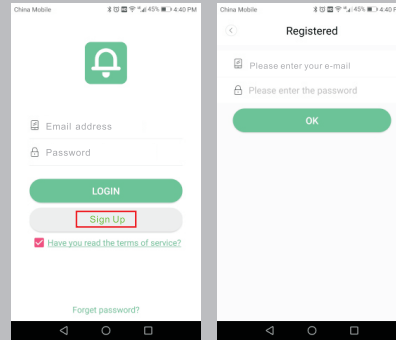

STEP 3 ADD DEVICE

Tap the to add
a new device.



STEP 4 SCAN QR CODE


Scan the QR Code
located behind the
device using the app.



STEP 5 Wi-Fi CONFIGURATION

Note: Make sure your
phone/tablet is connected to your
Wi-Fi internet prior to configuring
the Wi-Fi for the doorbell.

Configure Wi-Fi within 10 feet and
in sight of your Wi-Fi router.


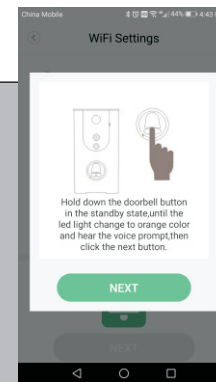


Hold down the doorbell
button for 5 seconds
to initiate Wi-Fi
configuration mode. The
LED light will illuminate
orange and once you hear
the voice prompt, tap
“Next.”

STEP 6 Wi-Fi SET UP FOR iOS & ANDROID




1. Tap “CONNECT IBELL”
button and chose network
“IBELL” in Wi-Fi settings.
2. Return to the app
and tap “Next”.

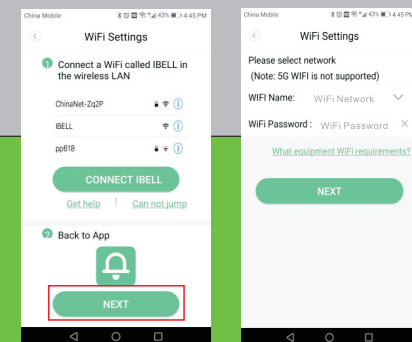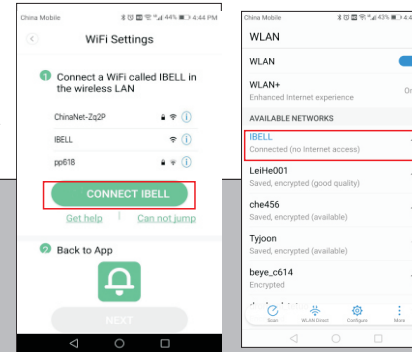

TIP:
Wi-Fi SET UP
NOT WORKING
Try restarting
your router.

STEP 7 APP/DEVICE CONNECT

Once the Wi-Fi set up is complete and
you hear the voice prompt confirming
that the Wi-Fi configuration was
successful, tap “Done”.

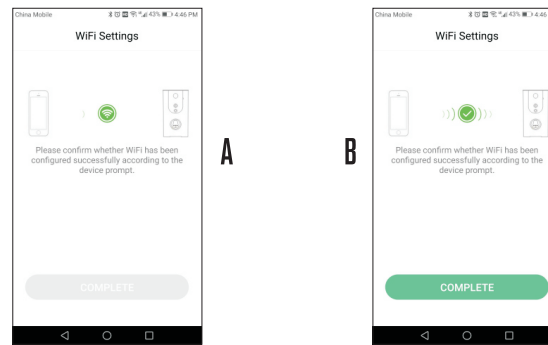


DONE!

DEVICE INSTALLATION
Simply press the
doorbell button to start.




**FLIP OVER
FOR MORE
DETAILS!**



AUTOMATICALLY WAKES UP

Tap the picture
Quick access via app
within 3 seconds.

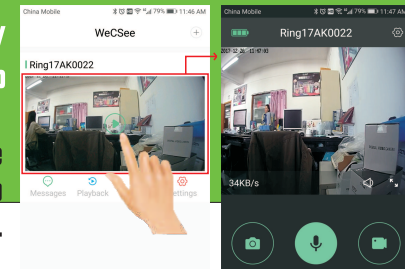

REMOTE VIEWING NOTIFICATIONS




When the doorbell
button is pressed, the
app will send the
following notifications,
depending on the mode
it's on.

STANDBY MODE

Android
will receive a phone call.

iPhone
will receive a push
notification. Tap to
continue.

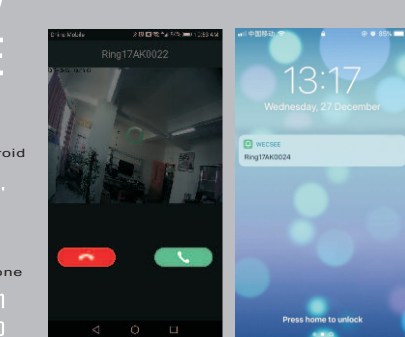



Henan Eshow Electronic Commerce Co.,Ltd

Add:Room 722, Sanjiang Building, No.170 Nanyang Road, Huiji District, Zhengzhou, Henan, China
Facebook: facebook.com/TivdioRadio
E-mail: support@tivdio.com

APP INTERFACE FUNCTIONALITY

- TAP TO TAKE A SNAPSHOT
- TAP AND HOLD DOWN TO TALK
- TAP TO RECORD VIDEO
- BATTERY LIFE: Runs up to 8 months after 1 full charge

PIR SETTINGS


This function can only be enabled AFTER the app has been successfully added to your phone.

When pir alarm(PIR) are turned on, you'll be notified on your phone whenever motion is detected or when theft is attempted.




DEVICE APP FUNCTIONS

After installing the app, go into your device's information by tapping on the added device. Here you may review your pictures, videos, change your Wi-Fi settings, share the device or delete the device.

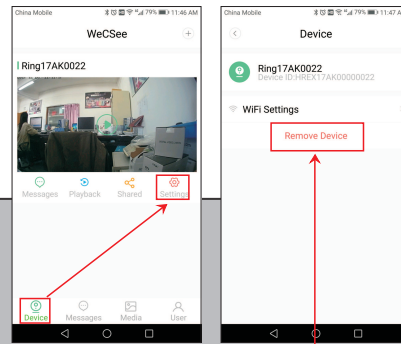

Note: If you wish to no longer use the device, please delete it from your phone using this option.

By tapping the Playback icon, you'll be able to access your SD-Card/cloud storage and review all your device's storage video records.

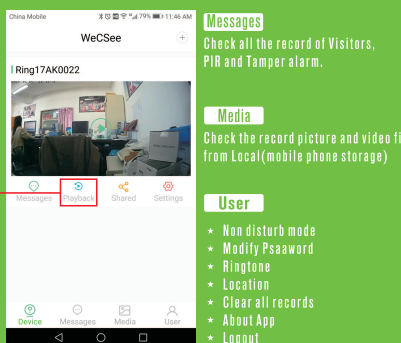

SHARING WITH OTHER PHONES

Shared users: Please download and install the app before proceeding.

This device can support 4 users. The shared users can add the device by scanning the shared QR Code provided by the Administrator(owner of device).

ADMINISTRATOR:
Setp 1: Choose the device you want to share.

Setp 2: Tap SCAN QR CODE SHARING. A QR Code will pop up.


SHARED USER:
Setp 3: Tap on ADD NEW DEVICE and click on icon to scan the QR Code.

Setp 4: Scan the QR CODE that appears on the app of Administrator.


Setp 5: Tap "OK".

Setp 6: "Admin" Choose "AGREE."

Setp 7: Refresh Device List.

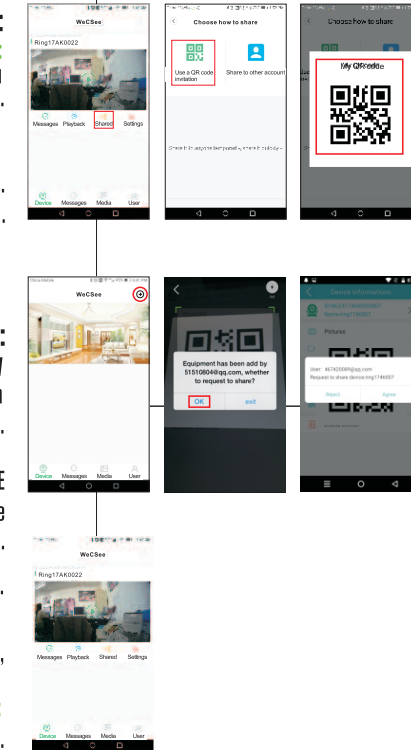

MOUNTING WALL INSTALLATION

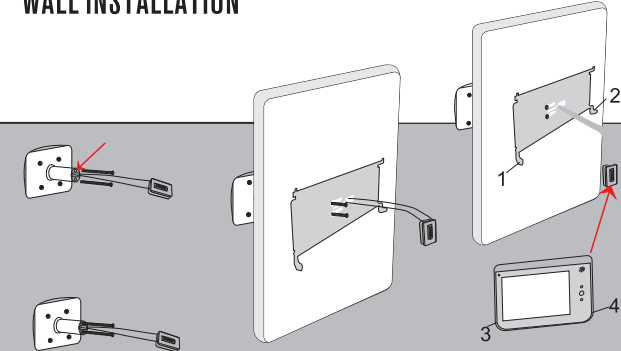

Setp 1: Put the screws into the device hole

Setp 2: Take the cable through the door's hole and through the mounting plate, and hang to the steel plate 1 and 2 position, then tighten the screws

Setp 3: Plug the cable and buckle into the correct location of LCD machine, and hang to the steel plate 1 and 2 position, then screw the position of 3 and 4 position


TROUBLE SHOOTING

WONT TURN ON: Please ensure that the device is properly charged.

DEVICE WONT TURN ON AFTER INITIAL USE:
If you remove the device from the mounting plate while the Tamper Alarm function is turned on, you may disable the device. Simply put it back on the mounting plate and press the doorbell button. GO to the app settings to turn off the Tamper Alarm.

DEVICE WONT TURN ON AFTER INITIAL USE:
If prompted with "The Connection Failed, Please Check The Wi-Fi Configuration is Correct" when ringing the doorbell after the device has been successfully configured, there may be too many barriers (typically walls) between your Wi-Fi router and the device which has weakened the signal.

PARTS & SPECS

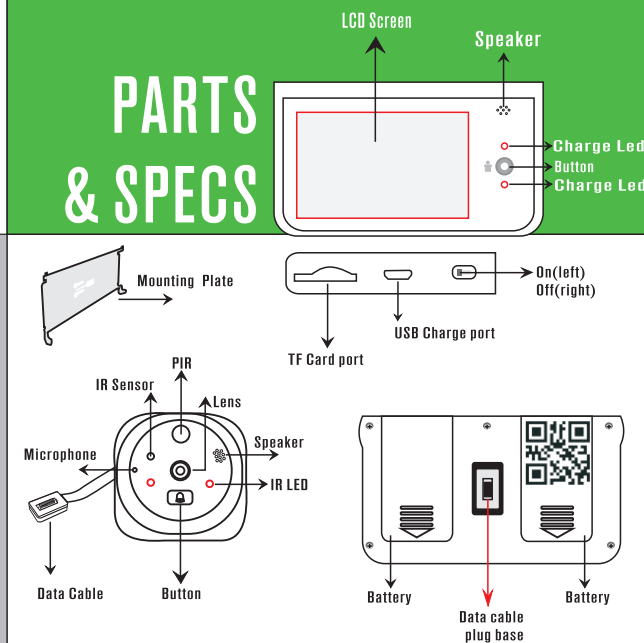

SPECIFICATION:

MATERIAL: Aluminum Alloy
LCD SIZE: 4.3 Inch
DISPLAY RESOLUTION: 720P
BY PHONE: Android, iOS
ANGLE OF VIEW: 166°
MOTION DETECTION: Support PIR
WI-FI MODE: 802.11 b/g/n
INPUT/OUTPUT: Built-in microphone, two-way audio
NIGHT VISIBILITY: 2pc IR-LEDS, Night vision up to 3 meters
STORAGE: Cloud storage and TF Card(32GB Max.)
BATTERY: 3000mAh battery, charged by USB(5V,1A)
USER ACCOUNTS: Total 4 Users(Admin user and shared user)
CERTIFICATION: CE,FCC,ROHS

PRECAUTIONS



Avoid Choking Hazard
Small Parts. Not for children under 3 years.



Due to the special nature of wireless products, please try to avoid or away from the following places when using:

- 1) large-scale mobile equipment base station, signal tower around;
- 2) Refrigerators, air conditioners, TVs and other high-power electrical appliances around;
- 3) Hospital large-scale ultrasound equipment;
- 4) Glass, steel and other high-density sealed building.
- 5) Defibrillators or other Implanted Medical Devices Persons with pacemakers, Implantable Cardioverter Defibrillators (ICDs) or other active implantable medical devices (AIMD) should:
 - ALWAYS keep the device more than 15 cm from their pacemaker when the device working.
 - Consult with their physicians regarding the potential risk of interference from radio frequency device, such as portable radios (poorly shielded medical devices may be more susceptible to interference).
- 6) Other Medical Devices;
- 7) If you use any other personal medical device, consult the manufacturer of your device to determine if it is adequately shielded from RF energy. Your physician may be able to assist you in obtaining this information;
- 8) Please pull out the antenna before using, so that the receiver can receive message more further;
- 9) After finish the settings, please power off the host and restart to make it effective;
- 10) Please use our original binding parts, especially the original binding battery and power adapter;

EU Importer :

Name : Germany Retevis Technology GmbH
Address : Uetzenacker 29,38176 Wendeburg